





POST PRESS  
MAILROOM  
BOOKBINDERY

Single delivery  
tabloid & chopper



Single delivery  
tabloid only




## RS 24 - ENTRY LEVEL STACKER


## Requirements & Solutions

The RS 24 is the entry level stacker for smaller presses. Available as 13" and 17" models, it perfectly fits the needs of commercial as well as newspaper printers. The RS 24 is a "plug and play" machine which can be upgraded with different options to fulfill special requirements. It can be used stand alone or configured with an infeed conveyor and bumpturn/flowturn combination tower in order to perfectly fit single delivery presses with tabloid and chopper fold. The stacker is equipped with divert gate for automatic copy rejection, stream aligner with side belts, squeeze roller, mechanical counter, gapper, upper bin unit with flipper fingers, turntable with integrated stack compression and delivery table. Superior reliability, easy operation and low maintenance costs combined with an attractive price make this stacker the first choice not only for new presses but also as replacement behind existing presses, as an economical & simple back-up stacker or replacement of manual pile down.

## Technical Data

Formats		min	max
	"A" Dimension	102 mm (4.00")	321 mm (12.63")
	"B" Dimension	152 mm (6.00")	500 mm (19.68")
	"D" Dimension	limited by "A" & "B"	588 mm (23.10")
	Thickness	4 pages @ 57 g/m <sup>2</sup> (35lbs)	96 pages @ 57 g/m <sup>2</sup> (35lbs)
Speed	product permitting		55 000 products per hour
Stack height RS 2413	upper bin total stack		127 mm (5.00") 330 mm (13.00")
Stack height RS 2417	upper bin total stack		177 mm (7.00") 432 mm (17.00")
Infeed height RS 2413		470 mm (18.50")	1194 mm (47.00")
Infeed height RS 2417		572 mm (22.50")	1295 mm (51.00")
Infeed stream lap		30 mm (1.18")	100 mm (3.94")
Product orientation	spine leading (preferred), spine to the side (product permitting)		
Delivery height	876 mm (34.50")		
Input power	3 KVA, 50/60 Hz, 3 ~ (see voltage selection)		
Air requirement	110 l/min @ 5.5 bar (6 cfm @ 80 psi)		
Weight	900 kg (2000 lb)		
Noise level DIN 45635 Section 27			85 dB(A)

Technical specification available upon request. The manufacturer reserves the right to change the technical specification without prior notice. (RS 24-EN-February 2010)

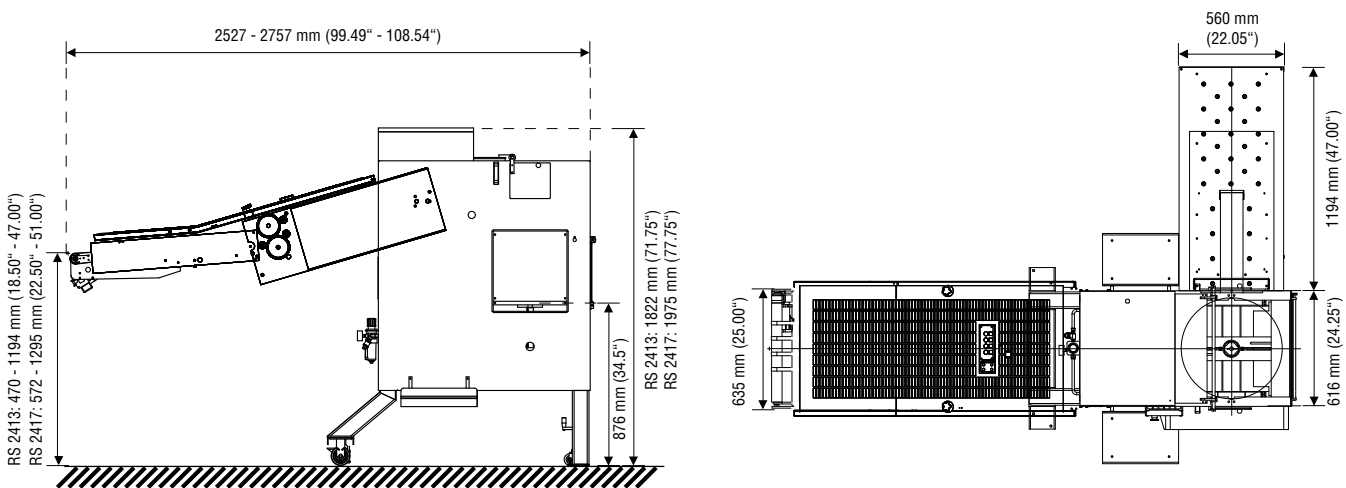

**RIMA SYSTEM**

[www.rima-system.com](http://www.rima-system.com)

RIMA-SYSTEM Europe, Germany · RIMA-SYSTEM Atlanta LLC, USA · RIMA-SYSTEM Far East Pte Ltd, Singapore · RIMA-SYSTEM Corporate Office, USA  
SYSTEM UK Ltd, United Kingdom · CIVIEMME-SYSTEM S.r.l., Italy · RIMA-SYSTEM Support Center Central America, Guatemala